

DBT Specifications

Frequency Response	+0, -2dB, 20Hz to 20kHz
Distortion	*0.005% @ 1kHz
Nominal Impedance	600
Source Impedance	*<400 , recommended
Load Impedance	*>600 , recommended
Maximum input level	*+19dBu @ 20Hz, +29dBu @ 50Hz
Pin Assignment XLR	Pin 1 = Gnd, Pin 2 = Hot (signal +), Pin 3 = Cold (signal -)
Phono	Tip = Hot (signal +) connected to Pin 2 on INPUT XLR Sleeve = Cold (signal ground) connected to Pin 3 on INPUT XLR

*See section on 'Using the DBT'

0dBu = 0.775Vrms



Dual 600 Transformer Balancing Interface

Manufactured by LA Audio (a division of SCV Electronics Ltd),
40 Chigwell Lane, Oakwood Hill Ind. Est. Essex. IG10 3NY
www.laaudio.co.uk

LA Audio reserves the right to alter the design specifications of its products without prior notice. E&OE.
Copyright LA Audio 2000

Version 2



April 2000

Why use a Transformer Balancing box

The main reason for using a Transformer Balancing box is to provide virtual electrical isolation between pieces of equipment where ground loops are a problem. The DBT can also provide un-balanced to balanced conversion to drive long cable lengths without degradation. The DBT has both Phono and XLR connectors to allow interfacing between semi-pro unbalanced and fully balanced equipment.

The DBT Transformer Balancing box provides -


- Balanced to unbalanced conversion
- Electrical isolation between inputs and outputs
- Ground lift switching
- Unbalanced Phono to balanced XLR conversion

Using the Di2

The DBT is a passive device and as such needs to be driven from a low impedance source to ensure the best performance. Therefore actual performance will depend on source and destination impedances. The following table gives maximum signal levels for a given distortion as a function of source impedance. Load impedance is 600 .

Source impedance	Maximum level for 0.1% distortion @ 50Hz - dBu	Comments
0	+30	
40	+25	
200	+20	
1k	+10	Distortion @ 50Hz cannot be lower than 0.5%
10k	N/A	Excessive distortion 5%

Connections

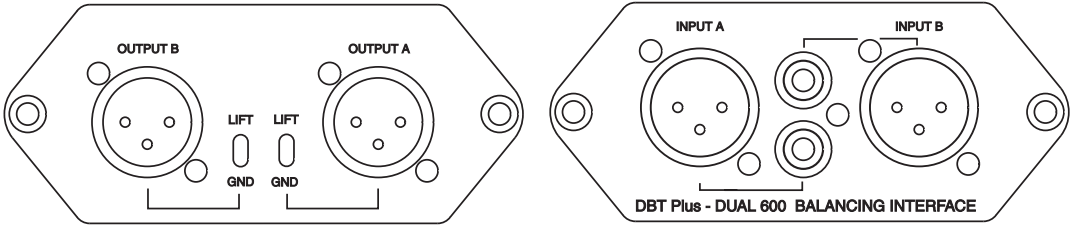

DBT plus Front and Rear panels

INPUT A and B

Balanced 3 pin female XLR and RCA Phono connectors. The phono is wired Tip to Pin 2 and Sleeve to Pin 3 on the INPUT XLR.

OUTPUT A and B


Balanced 3 pin male XLR.

Please note: Channel A and B are isolated from each other

Controls

GND/LIFT switch

With the Ground Lift switch in the LIFT position the connection between Pin 1 on the INPUT and OUTPUT XLRs is broken.

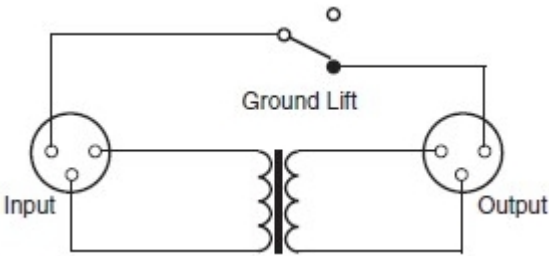

WARNING

The DBT plus should not be considered as a safety device ie. to provide a safety barrier between hazardous voltages and an operator and/or equipment and should not be used where hazardous voltages are likely to occur.